


OXYMED

P2-TOC

**Transportable
Oxygen Concentrator**

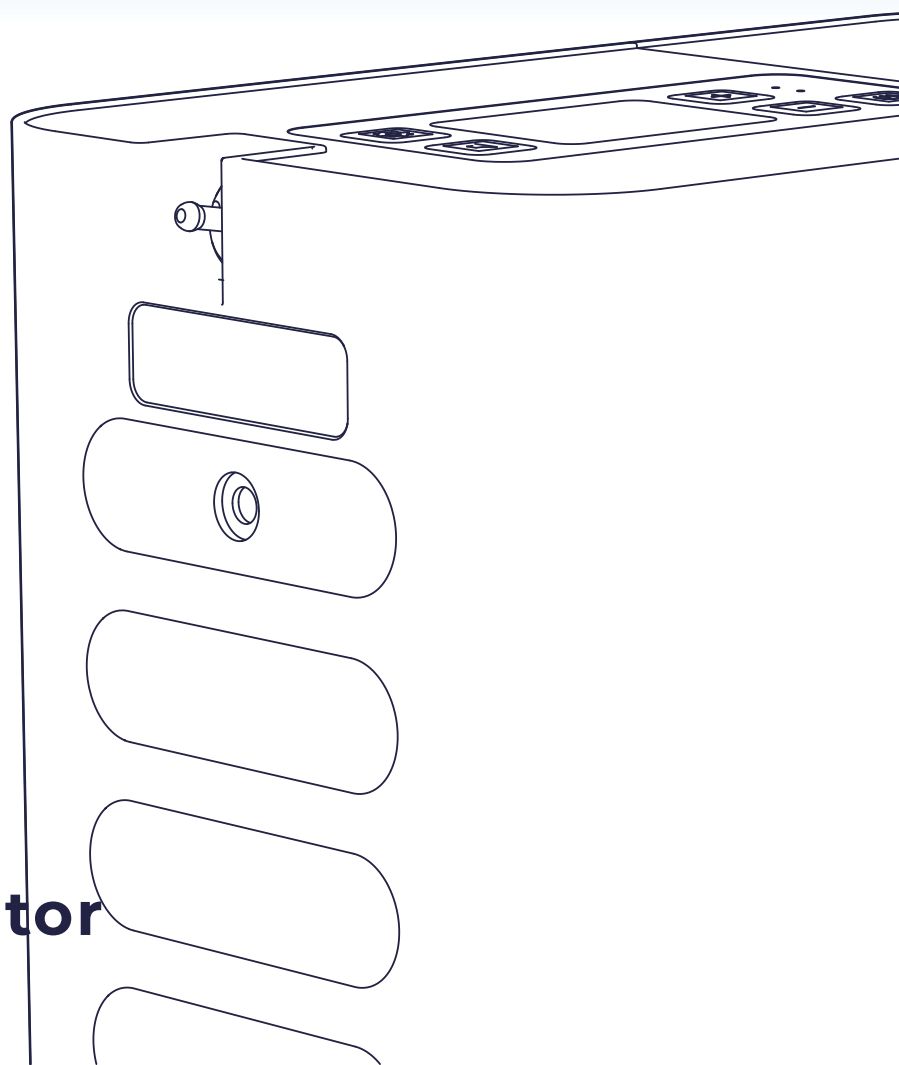

Specifications



Model: P2-TOC

Weight: 8KG $\pm$ 0.1KG

Size: 28.2 W * 17.1 D * 38.2 H (cm)

Warm up time: 5 minutes

Display Screen: 2.8"

Warranty: Three years

Use: Designed for 24/7 use

Rechargeable Battery: 14.4VDC

Battery Rated Capacity: 20Ah

AC Power Supply: 100-240v, 50-60hz

(Auto sensing to allow for worldwide use.)

P2-TOC

Specifications

Settings	Continuous Flow: Five Flow Settings (1-5). Max 3 Liters Pulse Flow: Ten Flow Settings (1-10). Max 2 Liters
Battery	20,000mAh, duration up to 9.5 hours on Pulse setting 1 Approx 8 hours charge time with AC/DC adapter
Operation	Simple control functions and easy-to-read LCD display
Oxygen Flow	Continuous Flows & Pulse Flows delivery system
Oxygen Concentration	90% - 3% /+ 5.5% at all settings



Standard Accessories



Cart # CT-TOC




Battery: BA-M700



**DC Power Supply:
ED1010C**



**Nasal Cannula:
NOC-DAW0721**

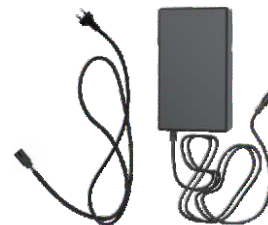

**AC Power Supply:
EM12502J**

Standard Accessories



Intake Filter-1: FI-T001




Intake Filter-2: FI-T002



Carry Bag # BP-TOC

User Control

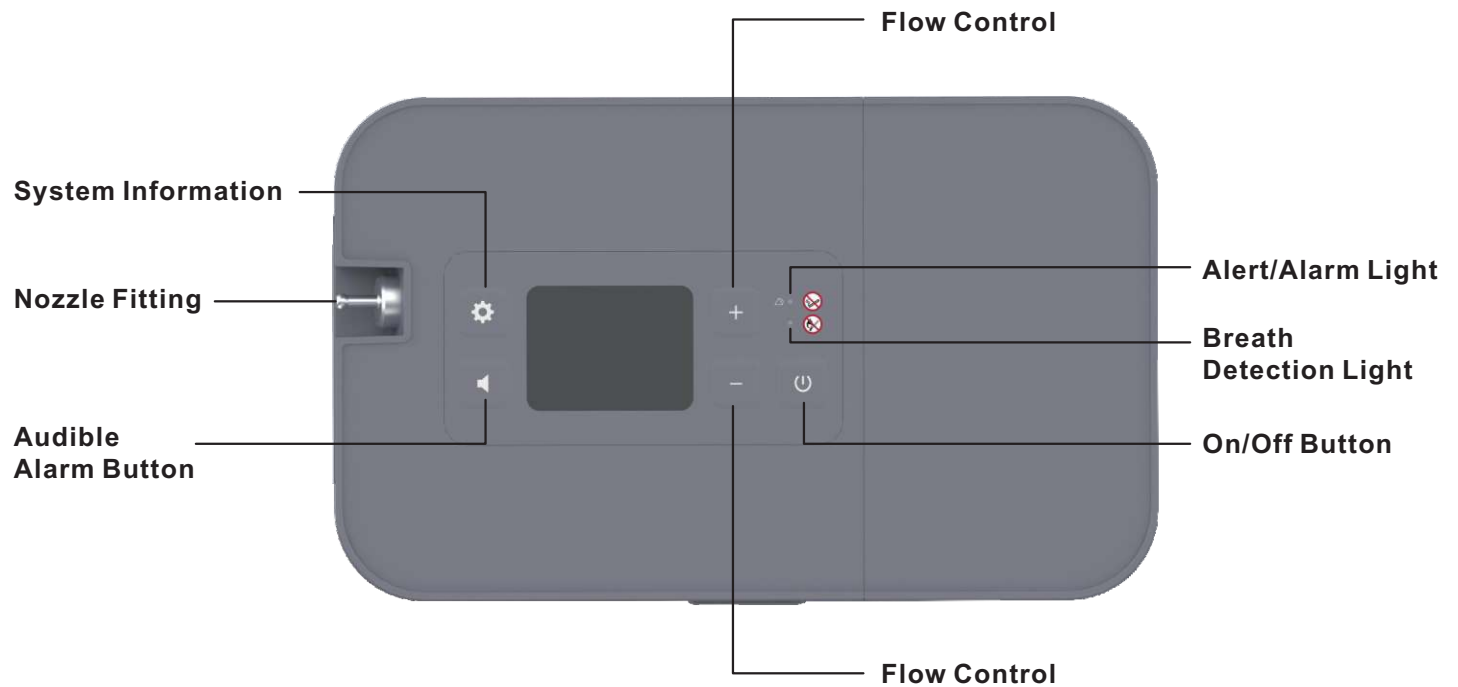

**Transportable
Oxygen Concentrator**

User Control



P2-TOC

Two Modes: Continuous Flow & Pulse Flow


Mode	Setting	Flowrate L/Min
Continuous Flow	1	1.0
	2	1.5
	3	2.0
	4	2.5
	5	3.0

Deliverable Oxygen flow accuracy:
Flow error is less than 10% or 0.2 L/min, whichever is greater.

Pulse Flow	1	0.2
	2	0.4
	3	0.6
	4	0.8
	5	1.0
	6	1.2
	7	1.4
	8	1.6
	9	1.8
	10	2.0



1

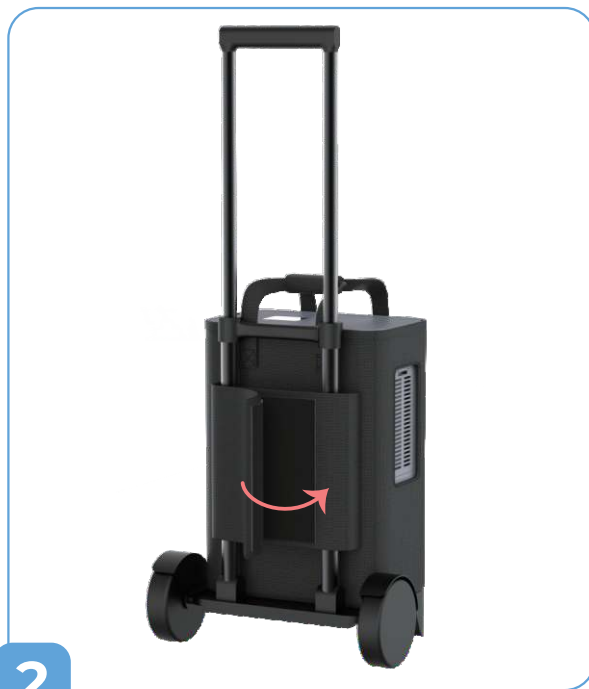

2



3



4



87% - 95.5%
O₂ Purity



Light weight
8KG±0.1KG



Up to 9.5 Hours
Battery Duration





**Universal Cart
for Easy Transport**



**Up to 3L Continuous Flow
and 2L Pulse Flow**



Head Office:

Plot No. A-12, A-13, Apparel Park, Phase 1,
Doddaballapur Industrial Area,
Bengaluru-561203, Karnataka, India

Branch Offices:

New Delhi, Hyderabad,
Bhubaneshwar, Surat, Pune,
Lucknow, Jaipur and Kerala

To stay upto date about
our products, follow us on :



080-28362444, 080-28362555



www.medequip.co.in